




1550 siapower

Boost your efficiency

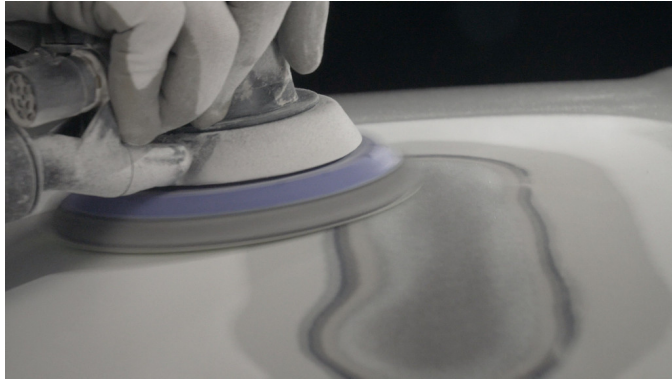

Boost your efficiency

Efficient stock removal and a very long lifetime in dry sanding applications. The paper thickness, which is tailored to the grit and application, performs impressively on bodyfiller, primer filler and varnish materials. 1550 siapower uses sustainable FSC paper for the abrasive backing.

- ▶ Greater efficiency thanks to application-optimised process steps
- ▶ Highest stock removal rate
- ▶ Performance-enhancing grit mix with ceramic aluminium oxide in the 40–220 grit range
- ▶ Minimal clogging characteristics for lacquer sanding grit range 400-600
- ▶ Sustainable FSC paper for the abrasive backing

Product profile

Grit type:	Mixed grit with ceramic content	40 – 220
	Semi-friable aluminium oxide / blue-fired	240 – 600
	White aluminium oxide	800
Grit range:	40; 60-240; 320; 400-800	
Backing:	d-wt paper (FSC-certified)	40 – 100
	c-wt paper (FSC-certified)	120 – 240
	b-wt paper (FSC-certified)	320 – 800
Coating:	Electrostatic	
Bonding:	Resin over resin	
Special coating:	Stearate	240 – 800

Use



Applications

- Keying of polyesters and composites
- Sanding out feather edges, flash rust and stone chips
- Shaping of bodyfillers and primer fillers
- Keying of new components and factory primers
- Sanding of old lacquer
- Producing a matt finish on old and new lacquers for blending
- Flattening of bodyfiller and primer filler
- Removal of orange peel effect and dust inclusions
- Preparation for polishing on high-gloss surfaces

Materials

Colour; Primer filler; Bodyfiller; Lacquer; Old lacquer; Primer coat; Epoxy primer coat; Cathodic dip primer coat; Plastics; Acrylic glass; Gelcoat polyester; Glass-fibre reinforced plastic (GRP)

Technology

S Performance; siafast